



UL 1028  
Product Description

⚡ Rated voltage  
**600V**

🌡️ Rated temperature  
**105°C**

🔥 Fire Performances  
**Horizontal flame**


🔗 AWG  
**22AWG-6AWG**

📦 **CU** Conductor  
**Solid / Stranded**

🌀 Insulation  
**PVC**

🕒 Bend Radius  
**10X**

Marking Example:  
E209277 cUL AWM STYLE 1028 105°C 600V FT2 □□AWG  
3A AWM IA 105°C 600V □□AWG FT2 3A LF

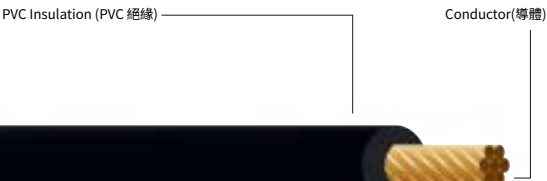

Conductor			Insulation	
AWG 線規	Stranded (No./mm) 線規/線徑	Diameter (mm) 絞合外徑	Insulation Thickness (mm) 絕緣厚度(mm)	OVERALL DIAMETER 完成外徑(mm)
6	259/0.254	5.46	1.58	7.89±0.15
8	161/0.254	3.72	1.20	6.12±0.15
10	105/0.254	3.01	1.20	5.41±0.15
12	65/0.254	2.37	1.20	4.77±0.1
14	41/0.254	1.88	1.20	7.28±0.1
16	26/0.254	1.50	1.20	3.90±0.1
18	34/0.18	1.21	1.20	3.62±0.1
20	21/0.18	0.95	1.20	3.36±0.1
22	17/0.16	0.76	1.20	3.17±0.1

AWM UL 758

3A Plus, 3a plus(logo), and 3A (logo) are trademarks. .  
Other logos, product and/or Company names may be trademarks of their respective owners