



600V PVC Wire

UL 10542  
Product Description



Rated voltage

600V



Rated temperature

60°C / 80°C / 90°C / 105°C



Fire Performances

Horizontal flame



AWG

34AWG-4/0AWG



Conductor

Solid / Stranded



Insulation

UL Labeled



Covering

PVC




Bend Radius

10X

Marking Example:

E209277 cUL AWM STYLE 10542 105°C 600V FT2 □□AWG  
3A AWM IA 105°C 600V □□AWG FT2 3A LF

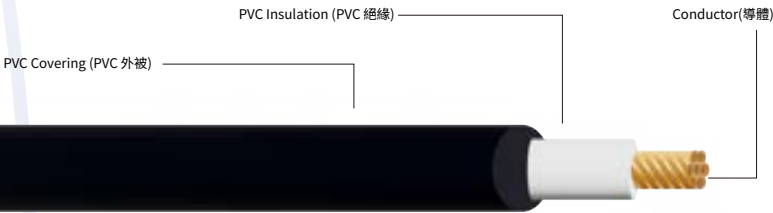

Conductor		Insulation		OVERALL DIAMETER
AWG 線規	Stranded (No./mm) 線規/線徑	Insulation Thickness (mm) 絕緣厚度(mm)	Covering (mm) 外被厚度(mm)	
16	26/0.254	0.40	0.50	3.30±0.15
18	34/0.18	0.40	0.50	3.01±0.15
20	21/0.18	0.40	0.50	2.75±0.15
22	17/0.16	0.40	0.50	2.56±0.15
24	11/0.16	0.40	0.50	2.41±0.15
26	7/0.16	0.40	0.50	2.29±0.15

AWM UL 758

3A Plus, 3a plus(logo), and 3A (logo) are trademarks.  
Other logos, product and/or Company names may be trademarks of their respective owners