

600V PVC Wire



三 甲 電 線 電 纜
3A PLUS
WIRE & CABLE

UL 1056
Product Description

⚡ Rated voltage
600V

🌡️ Rated temperature
105°C

🔥 Fire Performances
Horizontal flame


🔗 AWG
20AWG-10AWG

📦 ²⁹CU Conductor
Solid / Stranded

🌀 Insulation
PVC

🕒 Bend Radius
10X

Marking Example:
E209277 cUL AWM STYLE 1056 105°600V FT2 □□AWG
3A AWM IA 105°C 600V □□AWG FT2 3A LF

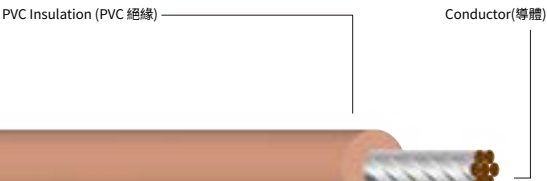

| Conductor | | | Insulation | |
|-----------|-------------------------------|--------------------------|--|---------------------------------|
| AWG 線規 | Stranded (No./mm) 線規/線徑 | Diameter (mm) 絞合外徑 | Insulation Thickness (mm) 絕緣厚度(mm) | OVERALL DIAMETER 完成外徑(mm) |
| 10 | 105/0.254 | 3.01 | 1.58 | 6.17±0.15 |
| 12 | 65/0.254 | 2.37 | 1.58 | 5.53±0.15 |
| 14 | 41/0.254 | 1.88 | 1.58 | 5.05 ±0.15 |
| 16 | 26/0.254 | 1.50 | 1.58 | 4.66±0.15 |
| 18 | 34/0.18 | 1.21 | 1.58 | 4.38±0.15 |
| 20 | 21/0.18 | 0.95 | 1.58 | 4.12±0.15 |

AWM UL 758

3A Plus, 3a plus(logo), and 3A (logo) are trademarks.
Other logos, product and/or Company names may be trademarks of their respective owners