




UL 1317


Product Description

 **Rated voltage**
600V


 **Rated temperature**
90°C / 105°C

 **Fire Performances**
Horizontal flame


 **AWG**
10AWG

 **Conductor**
Solid / Stranded round


 **Insulation**
PVC

 **Assembly**
Similar to Type THHN

 **Covering**
Nylon

 **Bend Radius**
10X

Marking Example:
E209277 cUL AWM STYLE 1317 90°C 600V FT2 □□AWG
3A AWM IA 90°C 600V □□AWG FT2 3A LF

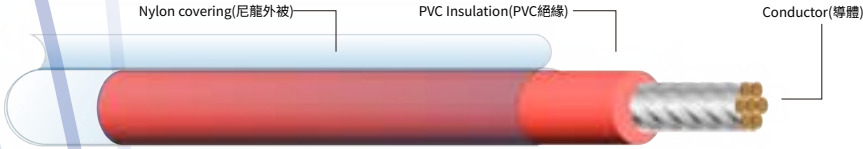

Conductor		Insulation		OVERALL DIAMETER
AWG	Stranded (No./mm)	Insulation Thickness (mm)	Jacket (mm)	
線規	線規/線徑	絕緣厚度(mm)	外被厚度(mm)	完成外徑(mm)
10	105/0.254	0.57	0.16	4.47±0.1

AWM UL 758

3A Plus, 3a plus (logo), and 3A (logo) are trademarks.
Other logos, product and/or Company names may be trademarks of their respective owners