




# UL 1346


## Product Description

 Rated voltage  
**600V**

 Rated temperature  
**105°C**

 Fire Performances  
**Horizontal flame**


 AWG  
**8AWG-2AWG**

 Conductor  
**Solid / Stranded**

 Insulation  
**PVC**

 Bend Radius  
**10X**

**Marking Example:**  
E209277 cUL AWM STYLE 1346 105°C 600V FT2 □□AWG  
3A AWM IA 105°C 600V □□AWG FT2 3A LF

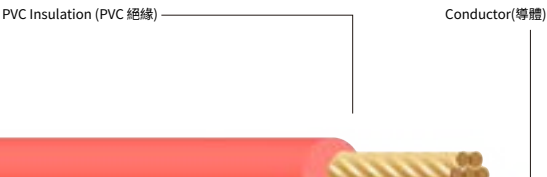

Conductor			Insulation	
AWG 線規	Stranded (No./mm) 線規/線徑	Diameter (mm) 絞合外徑	Insulation Thickness (mm) 絕緣厚度(mm)	OVERALL DIAMETER 完成外徑(mm)
2	665/0.254	8.74	1.58	10.73±0.15
4	420/0.254	6.94	1.58	9.18±0.15
6	259/0.254	5.46	1.58	7.89±0.15
8	161/0.254	3.72	1.58	6.88±0.15

AWM UL 758

3A Plus, 3a plus(logo), and 3A (logo) are trademarks.  
Other logos, product and/or Company names may be trademarks of their respective owners