



UL 1365

Product Description

Rated voltage
300V

Rated temperature
60°C

Fire Performances
Horizontal flame

AWG
30AWG-16AWG

Conductor
Solid / Stranded


Insulation
FRPE / PE

Covering / Shield
Optional(PVC/Nylon) /
Optional

Jacket
PVC

Bend Radius
10X

Marking Example:
E209277 cUL AWM STYLE 1365 60°C 300V FT2 □□AWG
3A AWM IA 60°C 300V □□AWG FT2 3A LF

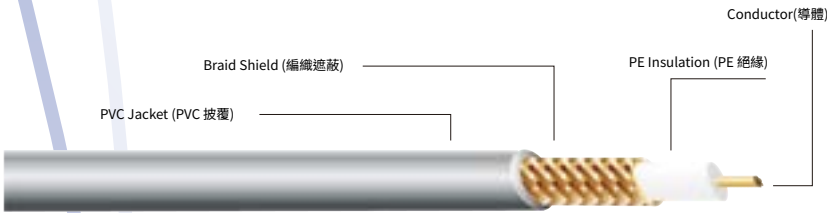

Conductor		Insulation			
AWG	Stranded (No./mm)	Thickness Of Insulation & Covering 絕緣厚度(mm)		Jacket (mm)	OVERALL DIAMETER
線規	線規/線徑	內	/ 外	外被厚度(mm)	完成外徑(mm)
16	26/0.254	0.64	0.09	0.50	3.97±0.15
18	34/0.18	0.64	0.09	0.50	3.68±0.15
20	21/0.18	0.64	0.09	0.50	3.42±0.15
22	17/0.16	0.64	0.09	0.50	3.23±0.15
24	11/0.16	0.64	0.09	0.50	3.08±0.15
26	7/0.16	0.64	0.09	0.50	2.96±0.15
28	7/0.127	0.64	0.09	0.50	2.86±0.15
30	7/0.10	0.64	0.09	0.50	2.78±0.15

AWM UL 758

3A Plus, 3a plus(logo), and 3A (logo) are trademarks.
Other logos, product and/or Company names may be trademarks of their respective owners