



300V PVC Wire

UL 1533  
Product Description



Rated voltage

Not Specified



Rated temperature

80°C



Fire Performances

Horizontal flame



AWG

30AWG-16AWG



Conductor

Solid / Stranded



Insulation  
SRPVC



Shield  
Optional




Jacket  
Optional(PVC)



Bend Radius

10X

Marking Example:  
E209277 cUL AWM STYLE 1533 80°C 300V FT2 □□AWG  
3A AWM IA 80°C 300V □□AWG FT2 3A LF

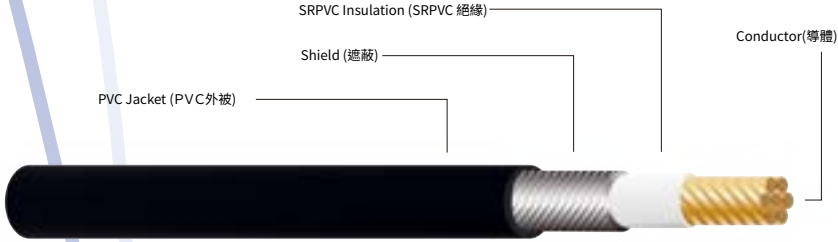

Conductor		Insulation			OVERALL DIAMETER
AWG 線規	Stranded (No./mm) 線規/線徑	Insulation Thickness & Jacket(mm) 內(mm) / 外(mm)		Jacket (mm) 外被厚度(mm)	
16	26/0.254	0.34	0.34	0.34	3.56±0.1
18	34/0.18	0.34	0.34	0.34	3.28±0.1
20	21/0.18	0.34	0.34	0.34	3.20±0.1
22	17/0.16	0.34	0.34	0.34	2.83±0.1
24	11/0.16	0.34	0.34	0.34	2.68±0.1
26	7/0.16	0.34	0.34	0.34	2.56±0.1
28	7/0.127	0.34	0.34	0.34	2.46±0.1
30	7/0.10	0.34	0.34	0.34	2.37±0.1

AWM UL 758

3A Plus, 3a plus(logo), and 3A (logo) are trademarks.  
Other logos, product and/or Company names may be trademarks of their respective owners