

600V PVC Wire



三 甲 電 線 電 纜  
3A PLUS  
WIRE & CABLE

UL 1617  
Product Description

⚡ Rated voltage  
600V

🌡️ Rated temperature  
105°C

🔥 Fire Performances  
Horizontal flame

🔗 AWG  
UL Labeled


📏 <sup>29</sup>CU  
Conductor  
UL Labeled

🌀 Insulation  
UL Labeled

🌀 Covering  
PVC

🕒 Bend Radius  
10X

Marking Example:  
E209277 cUL AWM STYLE 1617 105°C 600V FT2 □□AWG  
3A AWM IA 105°C 600V □□AWG FT2 3A LF

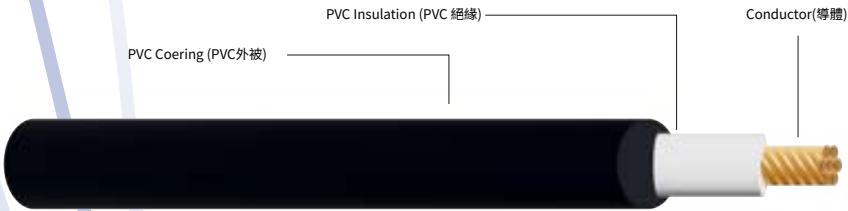

Conductor		Insulation		OVERALL DIAMETER
AWG 線規	Stranded (No./mm) 線規/線徑	Insulation Thickness (mm) 絕緣厚度(mm)	Covering (mm) 外被厚度(mm)	
16	26/0.254	0.40	0.50	3.30±0.15
18	34/0.18	0.40	0.50	3.01±0.15
20	21/0.18	0.40	0.50	2.75±0.15
22	17/0.16	0.40	0.50	2.56±0.15
24	11/0.16	0.40	0.50	2.41±0.15
26	7/0.16	0.40	0.50	2.29±0.15

AWM UL 758

3A Plus, 3a plus(logo), and 3A (logo) are trademarks.  
Other logos, product and/or Company names may be trademarks of their respective owners