




# UL 1673


## Product Description


 **Rated voltage**  
**600V**

 **Rated temperature**  
**105°C**

 **Fire Performances**  
**Horizontal flame**

 **AWG**  
**UL Labeled**


 **Conductor**  
**Solid / Stranded**

 **Insulation**  
**UL Labeled**

 **covering**  
**PVC / XLPVC**

 **Bend Radius**  
**10X**

**Marking Example:**  
E209277 cUL AWM STYLE 1673 105°C 600V FT2 □□AWG  
3A AWM IA 105°C 600V □□AWG FT2 3A LF

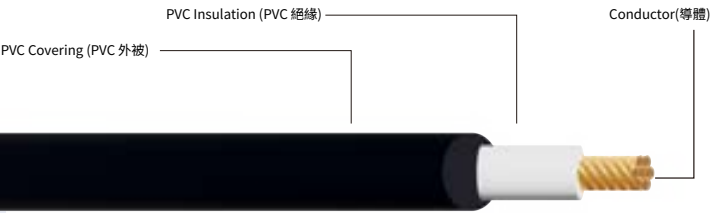

Conductor		Insulation		OVERALL DIAMETER
AWG	Stranded (No./mm)	Insulation Thickness (mm)	Covering (mm)	
線規	線規/線徑	絕緣厚度(mm)	外被厚度(mm)	完成外徑(mm)
16	26/0.254	0.55	0.19	2.97±0.10
18	34/0.18	0.55	0.19	2.68±0.10
20	21/0.18	0.55	0.19	2.42±0.10
22	17/0.16	0.55	0.19	2.23±0.10
24	11/0.16	0.55	0.19	2.08±0.10
26	7/0.16	0.55	0.19	1.96±0.10

AWM UL 758

3A Plus, 3a plus(logo), and 3A (logo) are trademarks.  
Other logos, product and/or Company names may be trademarks of their respective owners