



UL 1792

Product Description

Rated voltage
30V

Rated temperature
80°C

Fire Performances
Horizontal flame

AWG
40AWG min

Conductor
Solid / Stranded


Insulation
FRPE/ PE/ PVC/ FRPE/ PE/ PVC/ XLPE/
XLPVC/ XLPE/ XLPVC

Shield
Optional

Covering
Optional(PVC/Nylon)

Bend Radius
10X

Marking Example:
E209277 cUL AWM STYLE 1792 80°C 30V FT2 □□AWG
3A AWM IA 80°C 30V □□AWG FT2 3A LF

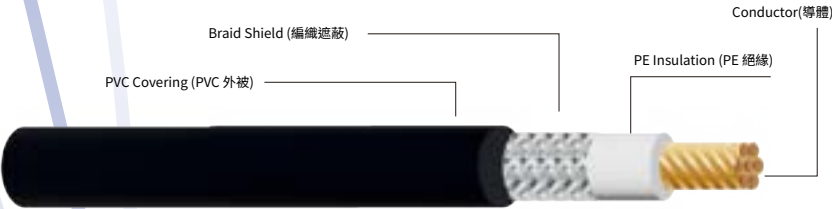

Conductor		Insulation		OVERALL DIAMETER
AWG	Stranded (No./mm)	Insulation Thickness (mm)	Covering (mm)	
線規	線規/ 線徑	絕緣厚度(mm)	外被厚度(mm)	完成外徑(mm)
4/0	2146/0.254	0.11	0.11	14.03±0.1
3/0	1615/0.254	0.11	0.11	12.23±0.1
2/0	1330/0.254	0.11	0.11	11.14±0.1
1/0	1026/0.254	0.11	0.11	9.84±0.1
2	665/0.254	0.11	0.11	8.01±0.1
4	420/0.254	0.11	0.11	6.46±0.1
6	259/0.254	0.11	0.11	5.16±0.1
8	161/0.254	0.11	0.11	4.15±0.1
10	105/0.254	0.11	0.11	3.45±0.1
12	65/0.254	0.11	0.11	2.81±0.1
14	41/0.254	0.11	0.11	2.32±0.1
16	26/0.254	0.11	0.11	1.94±0.1
18	34/0.18	0.11	0.11	1.66±0.1
20	21/0.18	0.11	0.11	1.40±0.1
22	17/0.16	0.11	0.11	1.21±0.1
24	11/0.16	0.11	0.11	1.06±0.1
26	7/0.16	0.11	0.11	0.93±0.1
28	7/0.127	0.11	0.11	0.83±0.1
30	7/0.10	0.11	0.11	0.75±0.1
32	7/0.08	0.11	0.11	0.69±0.1
34	7/0.06	0.11	0.11	0.63±0.1

AWM UL 758

3A Plus, 3a plus(logo), and 3A (logo) are trademarks.
Other logos, product and/or Company names may be trademarks of their respective owners