




UL 20276


Product Description

 **Rated voltage**
30V


 **Rated temperature**
60°C / 80°C


 **Fire Performances**
Horizontal flame / Cable flame

 **AWG**
40AWG min


 **Conductor**
Solid/ Stranded


 **Insulation**
UL Labeled

 **Assembly**
2-more condutors(twisted pairs / groups /laid parallel to form flat, oval, or round cables)

 **Covering / Shield**
Optional / PVC
Optional

 **Jacket**
PVC

 **Bend Radius**
10X

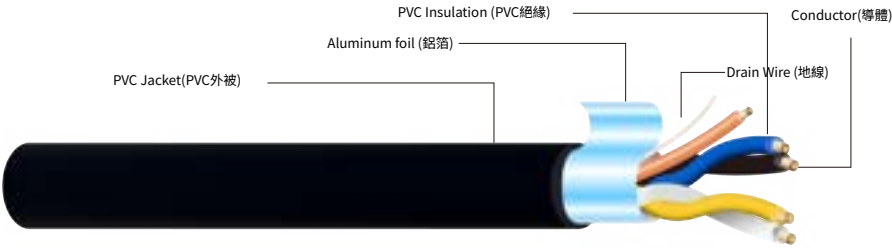

Conductor			Insulation		
Cores (N) 芯線	AWG 線規	Stranded (No./mm) 線規/線徑	Insulation overall Diameter(mm) 芯線直徑(mm)	Jacket of Thickness(mm) 外被厚度(mm)	OVERALL DIAMETER 完成外徑(mm)
4C	22	17/0.16	1.30	0.38	5.00±0.1
2P	24	7/0.20	1.02	0.51	5.50±0.1
2C	24	11/0.16	1.02	0.51	
3P	24	40/0.08	1.00	0.38	5.80±0.1
1C	24	7/0.20	1.02	0.38	

AWM UL 758

3A Plus, 3a plus (logo), and 3A (logo) are trademarks.
Other logos, product and/or Company names may be trademarks of their respective owners

Marking Example:
E209277 cUL AWM STYLE 20276 80°C 30 V VW-1 □□AWG
3A AWM 1A 80°C 30 V □□AWG VW-1 3A LF

