



UL 20327

Product Description



Rated voltage

300V

Rated temperature

105°C

Fire Performances

Cable flame

AWG

36AWG min

Conductor

Solid / Stranded

Insulation

UL Labeled

Assembly

2 or more insulated conductors are cabled together to form a round, flat, or oval cable.



Shield / Covering

Optional


Jacket

TPE

Bend Radius

5X min.**Marking Example:**

E209277 cUL AWM STYLE 20327 105°C 300V VW-1 □□AWG
 3A AWM IA 105°C 300V □□AWG VW-1 3A LF

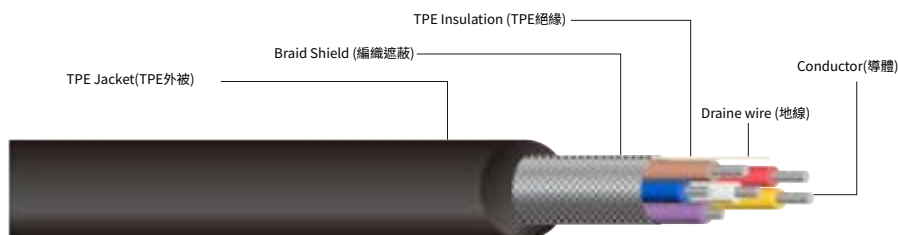

Conductor			Insulation		
AWG 線規	Stranded (No./mm) 線規/線徑	Cores (N) 芯線(C)	Insulation overall Diameter(mm) 芯線直徑(mm)	Covering&Jacket of Thickness(mm) 外被厚度(mm)	OVERALL DIAMETER 完成外徑(mm)
16	26/0.254	2	2.13	0.80	5.08±0.1
	34/0.18	2	1.84	0.80	4.60±0.1
18	34/0.18	3	1.84	0.80	5.27±0.1
	34/0.18	5	1.84	0.80	6.38±0.1
20	21/0.18	2	1.58	0.80	4.18±0.1
	21/0.18	3	1.58	0.80	4.76±0.1
	21/0.18	4	1.58	0.80	5.25±0.1
22	17/0.16	2	1.40	0.80	3.89±0.1
	17/0.16	3	1.40	0.80	4.40±0.1
	17/0.16	4	1.40	0.80	4.83±0.1
	7/0.254	1P	1.41	0.80	4.86±0.1
24	11/0.16	2	1.25	0.80	3.64±0.1
	11/0.16	3	1.25	0.80	4.10±0.1
	11/0.16	4	1.25	0.80	4.49±0.1
26	7/0.16	6	1.13	0.80	3.44±0.1
	7/0.16	2	1.13	0.80	3.85±0.1
	7/0.16	2	1.13	0.80	4.20±0.1
28	7/0.127	2	1.03	0.80	3.27±0.1
	7/0.127	4	1.03	0.80	3.97±0.1
30	7/0.10	2	0.94	0.80	3.14±0.1
	7/0.10	4	0.94	0.80	3.78±0.1

AWM UL 758

3A Plus, 3a plus(logo), and 3A (logo) are trademarks.

Other logos, product and/or Company names may be trademarks of their respective owners

