



UL 20330

Product Description



Rated voltage

30V

Rated temperature

105°C

Fire Performances

Cable flame

AWG

36AWG min

Conductor

Solid / Stranded

Insulation

UL Labeled

Assembly

2 or more insulated conductors are
cabled together to form a round,
flat, or oval cable.



Shield

Optional


Jacket

TPE

Bend Radius

5X min.**Marking Example:**

E209277 cUL AWM STYLE 20330 105°C 30V VW-1 □□AWG
3A AWM IA 105°C 30V □□AWG VW-1 3A LF

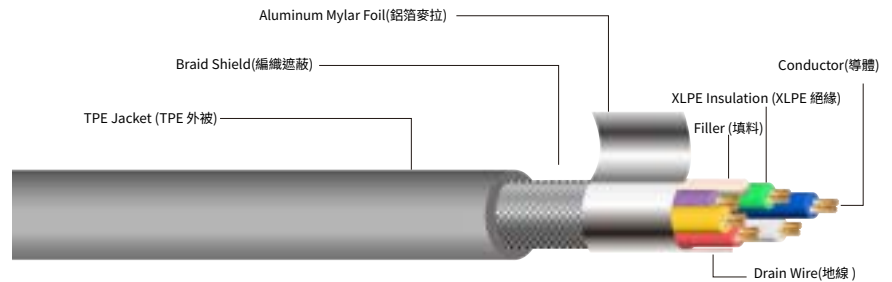

Conductor			Insulation		
AWG 線規	Stranded (No./mm) 線規/線徑	Cores (N) 芯線(C)	Insulation overall Diameter(mm) 芯線直徑(mm)	Jacket of Thickness(mm) 外被厚度(mm)	OVERALL DIAMETER 完成外徑(mm)
16	26/0.254	2	2.13	0.76	5.79±0.1
18	34/0.18	2	1.84	0.76	5.20±0.1
20	21/0.18	2	1.58	0.76	4.68±0.1
22	17/0.16	2	1.40	0.76	4.32±0.1
24	11/0.16	2	1.25	0.76	4.02±0.1
	11/0.16	12P	6.34	0.76	10.60±0.1
26	7/0.16	2	1.13	0.76	3.78±0.1
28	7/0.127	2	1.03	0.76	3.57±0.1
30	7/0.10	2	0.94	0.76	3.41±0.1

AWM UL 758

3A Plus, 3a plus (logo), and 3A (logo) are trademarks.

Other logos, product and/or Company names may be trademarks of their respective owners

