



UL 20626

Product Description



Rated voltage

30V / 150V / 300V / 600V



Rated temperature

80°C / 90°C



Fire Performances

Cable flame



AWG

Not apesified



Conductor

Solid / Stranded



Insulation

UL Labeled



Assembly

2-more conductors (twisted singles /
groups /laid parallel to form flat,
oval, or round cables)



Shield / Covering

Optional



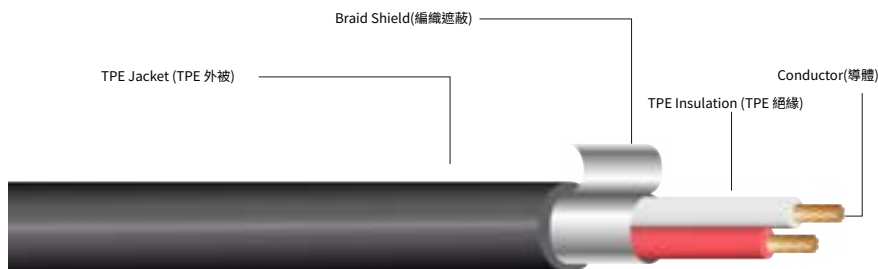
Jacket

TPE



Bend Radius

5X min.

Marking Example:
 E209277 cUL AWM STYLE 20626 90°C 30V VW-1 □□AWG
 3A AWM IA 90°C 30V □□AWG VW-1 3A LF


Conductor			Insulation		
AWG 線規	Stranded (No./mm) 線規/線徑	Cores (N) 芯線(C)	Insulation overall Diameter(mm) 芯線直徑(mm)	Jacket of Thickness(mm) 外被厚度(mm)	OVERALL DIAMETER 完成外徑(mm)
14	41/0.254	2	3.73	0.76	7.61±0.05
	41/0.254	3	3.73	0.76	8.98±0.05
	41/0.254	4	3.73	0.76	10.13±0.05
16	26/0.254	2	3.40	0.76	7.07±0.05
	26/0.254	3	3.40	0.76	8.31±0.05
	26/0.254	4	3.40	0.76	9.37±0.05
18	34/0.18	2	3.14	0.76	6.65±0.05
	34/0.18	3	3.14	0.76	7.80±0.05
	34/0.18	4	3.14	0.76	8.77±0.05
20	21/0.18	2	2.92	0.76	6.28±0.05
	21/0.18	3	2.92	0.76	7.35±0.05
	21/0.18	4	2.92	0.76	8.26±0.05
24	11/0.16	15	1.90	0.76	10.00±0.05
	11/0.16	18P	1.50	0.76	12.50±0.05
26	7/0.16	8	0.90	0.76	4.58±0.05
28	7/0.127	25P	1.20	0.76	11.50±0.05

AWM UL 758

3A Plus, 3a plus(logo), and 3A (logo) are trademarks.

Other logos, product and/or Company names may be trademarks of their respective owners

