



UL 20893

Product Description

 **Rated voltage**
600V


 **Rated temperature**
105°C

 **Fire Performances**
Horizontal flame

 **AWG**
30AWG-10AWG

 **Conductor**
Solid / Stranded


 **Insulation**
UL Labeled

 **Assembly**
2-200 insulated singles twisted pair triads
or quads laid parallel in one plane

 **Covering**
PVC

 **Bend Radius**
10X

Marking Example:
E209277 cUL AWM STYLE 20893 105°C 600V FT2 □□ AWG
3A AWM IA 105°C 600V □□ AWG FT2 3A LF

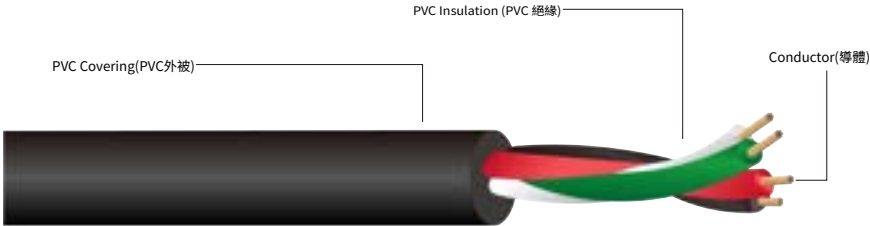

| Conductor | | | Insulation | | |
|-----------|-------------------------------|-----------------------|--|--|---------------------------------|
| AWG 線規 | Stranded (No./mm) 線規/線徑 | Cores (N) 芯線(C) | Insulation overall Diameter(mm) 芯線直徑(mm) | Covering of Thickness(mm) 外被厚度(mm) | OVERALL DIAMETER 完成外徑(mm) |
| 10 | 105/0.254 | 2 | 3.64 | 0.20 | 7.69±0.1 |
| 12 | 65/0.254 | 2 | 3.00 | 0.20 | 6.40±0.1 |
| 14 | 41/0.254 | 2 | 2.52 | 0.20 | 5.43±0.1 |
| 16 | 26/0.254 | 2 | 2.13 | 0.20 | 4.67±0.1 |
| 18 | 34/0.18 | 2 | 1.85 | 0.20 | 4.10±0.1 |
| 20 | 21/0.18 | 2 | 1.59 | 0.20 | 3.58±0.1 |
| 22 | 17/0.16 | 2 | 1.40 | 0.20 | 3.20±0.1 |
| 24 | 11/0.16 | 2 | 1.25 | 0.20 | 2.90±0.1 |
| 26 | 7/0.16 | 2 | 1.13 | 0.20 | 2.65±0.1 |
| 28 | 7/0.127 | 2 | 1.03 | 0.20 | 2.45±0.1 |
| 30 | 7/0.10 | 2 | 0.94 | 0.20 | 2.29±0.1 |

AWM UL 758

3A Plus, 3a plus (logo), and 3A (logo) are trademarks.
Other logos, product and/or Company names may be trademarks of their respective owners