



UL 20912

Product Description



Rated voltage

30V / 90V / 150V / 300V / 600V



Rated temperature

60/75/80/90/105°C



Fire Performances

Horizontal flame / Cable flame



AWG

Not Specified



Conductor

Solid / Stranded



Insulation

UL Labeled



Assembly

Two groups of conductors are laid parallel



Shield / Covering

Optional

Optional / PVC



Jacket

PVC




Bend Radius

10X

Marking Example:

E209277 cUL AWM STYLE 20912 105°C 600V VW-1 □□AWG
3A AWM IA 105°C 600V □□AWG VW-1 3A LF

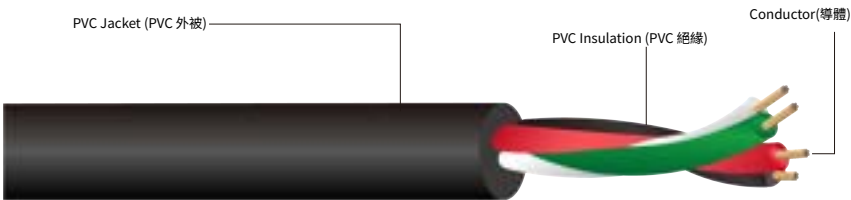

Conductor				Insulation		
Cores (N) 芯線		AWG 線規	Stranded (No./mm) 線規/線徑	ID(mm) 芯線直徑 (mm)	Jacket of Thickness(mm) 外被厚度(mm)	OVERALL DIAMETER 完成外徑(mm)
2C	-	12	65/0.254	3.00	0.76	8.5±0.2
2C	UL3237	16	7/0.45	3.00	0.51	8.5±0.2
2C	UL10097	22	7/0.254	1.30	0.51	
4C	-	22	34/0.16	1.80	0.76	6.10±0.2

AWM UL 758

3A Plus, 3a plus(logo), and 3A (logo) are trademarks.
Other logos, product and/or Company names may be trademarks of their respective owners

