



UL 21087

Product Description



Rated voltage

150V

Rated temperature

60°C

Fire Performances

Horizontal flame / Cable flame

AWG

36AWG-9AWG

Conductor

Solid / Stranded

Insulation

UL Labeled

Assembly

2 or more individual / groups insulated
conductors laid parallel / cabled together to
form a round, flat, or oval cable.



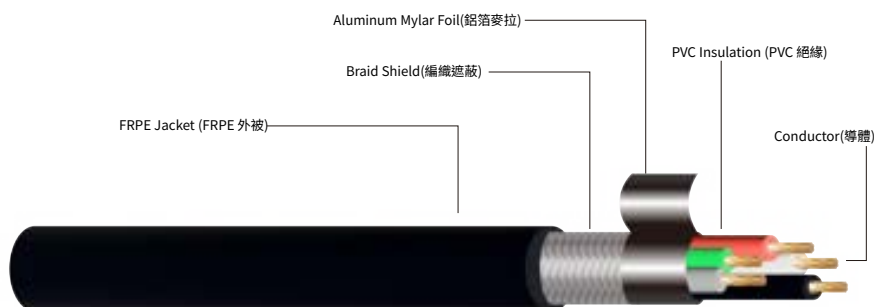
Shield

Optional**Optional / PVC**

Jaket

FRPE

Bend Radius

10X

Conductor			Insulation			
AWG 線規	Stranded (No./mm) 線規/線徑	Cores (N) 芯線(C)	Insulation overall Diameter(mm) 芯線直徑(mm)	Covering&Jacket of Thickness(mm) 外被厚度(mm)		OVERALL DIAMETER 完成外徑(mm)
16	26/0.254	2	2.13	0.13	0.76	5.00±0.1
	34/0.18	2	1.84	0.13	0.76	4.52±0.1
18	34/0.18	3	1.84	0.13	0.76	5.19±0.1
	21/0.18	2	1.58	0.13	0.76	4.10±0.1
20	21/0.18	3	1.58	0.13	0.76	4.68±0.1
	17/0.16	2	1.40	0.13	0.76	3.81±0.1
22	17/0.16	3	1.40	0.13	0.76	4.32±0.1
	11/0.16	2	1.25	0.13	0.76	3.56±0.1
24	11/0.16	3	1.25	0.13	0.76	4.02±0.1
	7/0.16	2	1.13	0.13	0.76	3.36±0.1
26	7/0.16	3	1.13	0.13	0.76	3.77±0.1
	7/0.127	2	1.03	0.13	0.76	3.19±0.1
28	7/0.127	3	1.03	0.13	0.76	3.57±0.1
	7/0.10	2	0.94	0.13	0.76	3.06±0.1
30	7/0.10	3	0.94	0.13	0.76	3.41±0.1

AWM UL 758

3A Plus, 3a plus (logo), and 3A (logo) are trademarks.
Other logos, product and/or Company names may be trademarks of their respective owners

Marking Example:
 E209277 cUL AWM STYLE 21087 60°C 150V FT2 □□AWG
 3A AWM IA 60°C 150V □□AWG FT2 3A LF

