



# UL 21115

## Product Description



Rated voltage

**1000V**

Rated temperature

**75°C / 80°C**

Fire Performances

**Horizontal flame**

AWG

**30AWG-4/0AWG**

Conductor

**Solid/ Stranded**

Insulation

**UL Labeled**

Assembly

2 or more insulated singles twisted  
together.




Covering / Jacket

**Optional / FRPE****FRPE**

Bend Radius

**10X****Marking Example:**

E209277 cUL AWM STYLE 21115 80°C 1000V FT2 □□AWG  
 3A AWM IA 80°C 1000V □□AWG FT2 3A LF

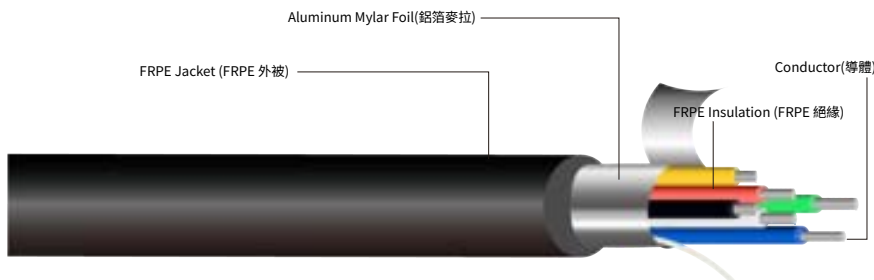

Conductor			Insulation			
AWG 線規	Stranded (No./mm) 線規/線徑	Cores (N) 芯線(C)	Insulation overall Diameter(mm) 芯線直徑(mm)	Covering&Jacket of Thickness(mm) 外被厚度(mm)		OVERALL DIAMETER 完成外徑(mm)
<b>24</b>	11/0.16	<b>5</b>	1.25	0.40	0.64	6.00±0.1
<b>26</b>	7/0.16	<b>5</b>	1.13	0.40	0.64	5.50±0.1
<b>28</b>	7/0.127	<b>5</b>	1.03	0.40	0.64	5.20±0.1
<b>30</b>	7/0.10	<b>5</b>	0.94	0.40	0.64	4.90±0.1

**AWM UL 758**

3A Plus, 3a plus(logo), and 3A (logo) are trademarks.

Other logos, product and/or Company names may be trademarks of their respective owners