



UL 21119

Product Description



Rated voltage

150V

Rated temperature

80°C

Fire Performances

Cable flame

AWG

36AWG-9AWG

Conductor

Solid / Stranded

Insulation

UL Labeled

Assembly

2 or more individual / groups insulated
conductors laid parallel / cabled together
to form a round, flat, or oval cable.



Shield / Covering

Optional


Jacket

FRPE

Bend Radius

10X**Marking Example:**

E209277 cUL AWM STYLE 21119 80°C 150V VW-1 □□AWG
3A AWM IA 80°C 150V □□AWG VW-1 3A LF

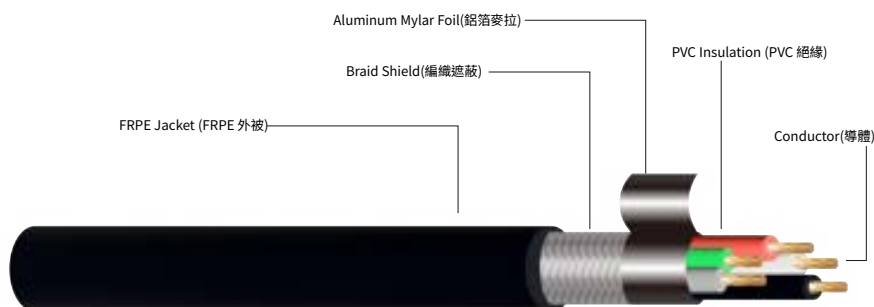

Conductor			Insulation			
AWG 線規	Stranded (No./mm) 線規/線徑	Cores (N) 芯線(C)	Insulation overall Diameter(mm) 芯線直徑(mm)	Covering&Jacket of Thickness(mm) 外被厚度(mm)		OVERALL DIAMETER 完成外徑(mm)
16	26/0.254	2	2.13	0.33	0.76	5.70±0.1
	34/0.18	2	1.84	0.33	0.76	5.20±0.1
18	34/0.18	3	1.84	0.33	0.76	6.50±0.1
	21/0.18	2	1.58	0.33	0.76	4.80±0.1
20	21/0.18	3	1.58	0.33	0.76	5.90±0.1
	17/0.16	2	1.40	0.33	0.76	4.50±0.1
22	17/0.16	3	1.40	0.33	0.76	6.40±0.1
	11/0.16	2	1.25	0.33	0.76	4.22±0.1
24	11/0.16	3	1.25	0.33	0.76	5.50±0.1
	7/0.16	2	1.13	0.33	0.76	4.02±0.1
26	7/0.16	3	1.13	0.33	0.76	4.80±0.1
	7/0.127	2	1.03	0.33	0.76	3.90±0.1
28	7/0.127	3	1.03	0.33	0.76	4.60±0.1
	7/0.10	2	0.94	0.33	0.76	3.70±0.1
30	7/0.10	3	0.94	0.33	0.76	4.50±0.1

AWM UL 758

3A Plus, 3a plus(logo), and 3A (logo) are trademarks.
Other logos, product and/or Company names may be trademarks of their respective owners

