



UL 21179

Product Description



Rated voltage

600V/1000V

Rated temperature

105°C

Fire Performances

Cable flame

AWG

40AWG min

Conductor

Solid / Stranded

Insulation

UL Labeled

Assembly

2 or more insulated conductors are
cabled together to form a round, flat,
or oval cable.



Covering/Shield

Optional / PVC

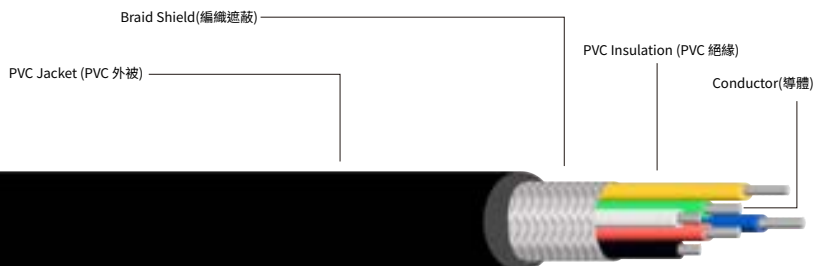
Optional



Jacket

PVC

Bend Radius

10X

Conductor			Insulation			
Cores (N) 芯線	AWG 線規	Stranded (No./mm) 線規/線徑	Insulation overall Diameter(mm) 芯線直徑(mm)	Covering&Jacket of Thickness(mm) 外被厚度(mm)		OVERALL DIAMETER 完成外徑(mm)
2F	10	105/0.254	3.46	0.15	0.76	7X12±0.1
	18	34/0.18	1.85	0.15	0.76	
3+4 (c)	22	17/0.16	1.40	0.15	0.76	10.00±0.1
	18	34/0.16	1.85	0.15	0.76	
4+6 (c)	22	17/0.16	1.40	0.15	0.76	10.80±0.1
	18	34/0.16	1.85	0.15	0.76	

AWM UL 758

3A Plus, 3a plus (logo), and 3A (logo) are trademarks.

Other logos, product and/or Company names may be trademarks of their respective owners

Marking Example:
 E209277 cUL AWM STYLE 211179 105°C 600V VW-1 □□AWG
 3A AWM IA 105°C 600V □□AWG VW-1 3A LF

