




# UL 21458


## Product Description

 **Rated voltage**  
**300V**


 **Rated temperature**  
**80°C**

 **Fire Performances**  
**Horizontal flame**

 **AWG**  
**32AWG-16AWG**


 **Conductor**  
**Solid / Stranded**

 **Insulation**  
**mPPE-PE**

 **Assembly**  
**2-100 conductors laid parallel and in one plane**

 **Bend Radius**  
**5X**

**Marking Example:**  
E209277 cUL AWM STYLE 21458 80°C 300V FT2 □□AWG  
3A AWM IA 80°C 300V □□AWG FT2 3A LF

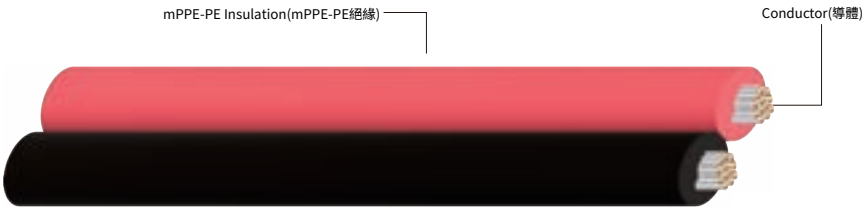

Conductor				Insulation	
AWG 線規	Stranded (No./mm) 線規/線徑	Diameter (mm) 絞合外徑	Cores (N) 芯數	Insulation of Thickness(mm) 絕緣厚度(mm)	OVERALL DIAMETER 完成外徑(mm)
18	34/0.18	1.21	2F	0.38	2.0x.4.0±0.10
20	21/0.18	0.95	2F	0.38	1.8x3.6±0.10
22	17/0.16	0.76	2F	0.38	1.6x3.2±0.10
24	11/0.16	0.62	2F	0.38	1.45x2.9±0.10
26	7/0.16	0.49	2F	0.38	1.3x2.6±0.10

AWM UL 758

3A Plus, 3a plus(logo), and 3A (logo) are trademarks.  
Other logos, product and/or Company names may be trademarks of their respective owners