



UL 22080

Product Description



Rated voltage

600V

Rated temperature

105°C

Fire Performances

Cable flame

AWG

Not Specified

Conductor

Solid / Stranded

Insulation

UL Labeled

Assembly

2-more condutors(twisted pairs /
groups /laid parallel to form flat,
oval, or round cables)



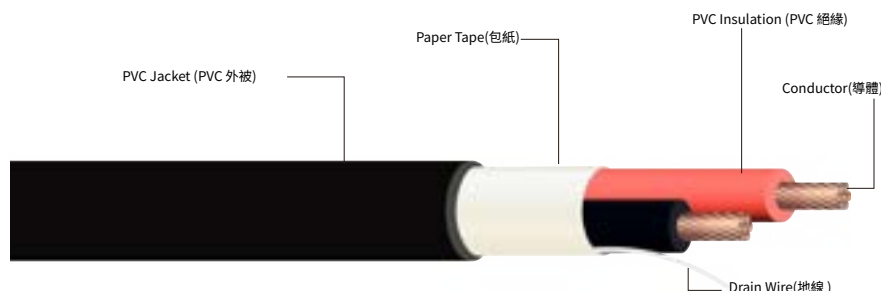
Shield / Covering

Optional

Jacket

PVC

Bend Radius

10X

Conductor			Insulation		
AWG 線規	Stranded (No./mm) 線規/線徑	Cores (N) 芯線(C)	Insulation overall Diameter(mm) 芯線直徑(mm)	Jacket of Thickness(mm) 外被厚度(mm)	OVERALL DIAMETER 完成外徑(mm)
14	41/0.254	2	2.50	0.80	6.48±0.1
16	26/0.254	2	2.12	0.80	5.90±0.1
18	16/0.254	2	1.80	0.80	5.40±0.1
20	21/0.18	2	1.57	0.80	5.00±0.1
22	7/0.254	2	1.40	0.80	4.70±0.1
24	11/0.16	2	1.23	0.80	4.41±0.1
26	7/0.16	2	1.11	0.80	4.21±0.1

AWM UL 758

3A Plus, 3a plus(logo), and 3A (logo) are trademarks.

Other logos, product and/or Company names may be trademarks of their respective owners

Marking Example:
 E209277 cUL AWM STYLE 22080 105°C 600V VW-1 □□AWG
 3A AWM 1A 105°C 600V □□AWG VW-1 3A LF
