



UL 2464

Product Description

 Rated voltage
300V

 Rated temperature
80°C

 Fire Performances
Cable flame

 AWG
Not Specified

 Conductor
Solid / Stranded

 Insulation
UL Labeled


 Assembly
2-more

 Shield / Covering / Braid
Optional

 Jacket
PVC

 Bend Radius
10X

Marking Example:
E209277 cUL AWM STYLE 2464 80°C 300V VW-1 ☐ AWG
3A AWM IA 80°C 300V ☐ AWG VW-1 3A LF

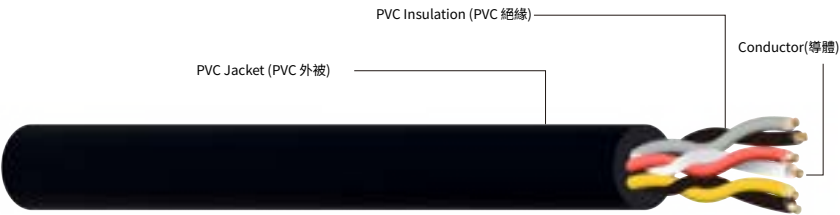

Conductor			Insulation		
AWG 線規	Stranded (No./mm) 線規/線徑	Cores (N) 芯數(P)	Insulation overall Diameter(mm) 芯線直徑(mm)	Jacket Thickness(mm) 外被厚度(mm)	OVERALL DIAMETER 完成外徑(mm)
16	26/0.254	2	2.13	1.20	6.20±0.10
	26/0.254	4	2.13	1.20	7.50±0.10
18	34/0.18	2	1.85	0.78	5.50±0.10
	34/0.18	3	1.85	0.95	5.50±0.10
	34/0.18	4	1.85	1.13	7.00±0.10
20	21/0.18	3	1.59	1.58	6.00±0.10
	21/0.18	4	1.59	0.96	5.50±0.10
	21/0.18	5	1.59	1.22	6.80±0.10
22	17/0.16	2	1.40	0.94	4.00±0.10
	17/0.16	3	1.40	0.95	4.50±0.10
	17/0.16	4	1.40	0.90	4.80±0.10
	17/0.16	5	1.40	1.07	5.50±0.10
	17/0.16	6	1.40	1.16	6.00±0.10
	17/0.16	7	1.40	1.02	6.00±0.10
	17/0.16	10	1.40	0.48	6.50±0.10
24	7/0.20	2	1.25	1.10	4.00±0.10
	17/0.16	4	1.40	0.88	4.30±0.10
	7/0.20	5	1.25	1.08	5.00±0.10
	7/0.20	6	1.25	0.95	5.00±0.10
	7/0.20	8	1.25	0.71	5.40±0.10
	7/0.20	12	1.25	0.85	6.50±0.10

AWM UL 758

3A Plus, 3a plus(logo), and 3A (logo) are trademarks.
Other logos, product and/or Company names may be trademarks of their respective owners

