



# UL 2468

## Product Description



Rated voltage

300V



Rated temperature

80°C



Fire Performances

Horizontal flame



AWG

32AWG-16AWG



Conductor

Solid / Stranded



Insulation

PVC



Assembly

2-150 conductors laid

parallel and in one plane.



Shield / Covering

Optional



Bend Radius

10X


### Marking Example:

E209277 cUL AWM STYLE 2468 80°C 300V FT2 □□AWG

3A AWM IA 80°C 300V □□AWG FT2 3A LF



Conductor(導體)  
PVC Insulation (PVC絕緣)

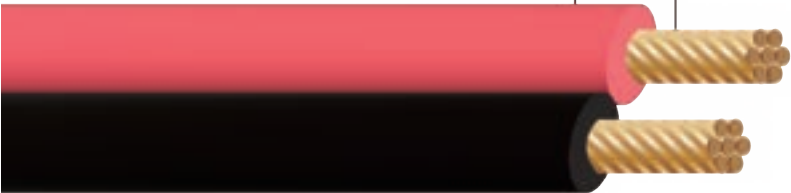

Conductor				Insulation	
AWG 線規	Stranded (No./mm) 線規/線徑	Diameter (mm) 絞合外徑	Cores (N) 芯數	Insulation of Thickness(mm) 絕緣厚度(mm)	OVERALL DIAMETER 完成外徑(mm)
16	26/0.254	1.50	2F	0.40	2.8x5.6±0.1
18	34/0.18	1.21	2F	0.40	2.3x4.6±0.1
20	21/0.18	0.95	2F	0.40	1.8x3.6±0.1
22	17/0.16	0.76	2F	0.40	1.65x3.3±0.1
24	11/0.16	0.62	2F	0.40	1.7x3.4±0.1
26	7/0.16	0.49	2F	0.40	1.6x2.6±0.1
28	7/0.127	0.39	2F	0.40	1.17±2.340.1
30	7/0.10	0.31	2F	0.40	1.19x2.38±0.1

AWM UL 758

3A Plus, 3a plus (logo), and 3A (logo) are trademarks.

Other logos, product and/or Company names may be trademarks of their respective owners