




UL 2651


Product Description

 **Rated voltage**
300V

 **Rated temperature**
105°C

 **Fire Performances**
Horizontal flame


 **AWG**
36AWG-14AWG

 **Conductor**
Solid/ Stranded


 **Insulation**
PVC

 **Assembly**
2- 150

 **Shield / Covering**
Optional / PVC

 **Bend Radius**
10X

Marking Example:
E209277 cUL AWM STYLE 2651 105°C 300 V FT2 □□AWG
3A AWM 1A 105°C 300 V □□AWG FT2 3A LF

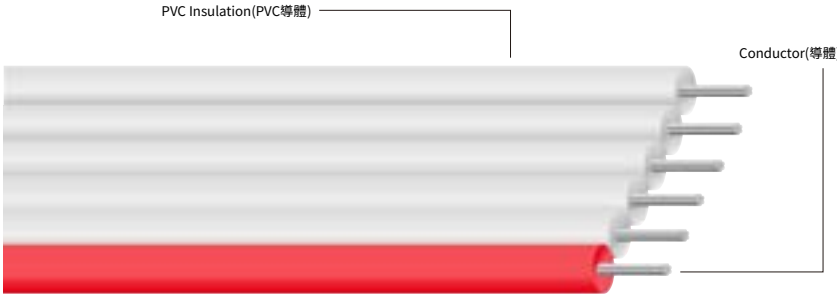

Conductor				Insulation	
AWG 線規	Stranded (No./mm) 線規/線徑	Diameter (mm) 絞合外徑	Cores (N) 芯數	Insulation of Thickness(mm) 絕緣厚度(mm)	OVERALL DIAMETER 完成外徑(mm)
22	17/0.16	0.76	2F	0.29	1.4x2.8±0.1
24	11/0.16	0.62	2F	0.29	1.2x2.4±0.1
26	7/0.16	0.49	2F	0.29	1.1x2.2±0.1
28	7/0.127	0.39	2F	0.29	1.0x2.0±0.1

AWM UL 758

3A Plus, 3a plus(logo), and 3A (logo) are trademarks.
Other logos, product and/or Company names may be trademarks of their respective owners