



UL 2725

Product Description



Rated voltage

30V



Rated temperature

60°C / 80°C



Fire Performances

Horizontal flame



AWG

UL Labeled



Conductor

Solid/ Stranded



Insulation

UL Labeled



Assembly

2-4 parallel / 2-more
twisted sigles or groups



Shield

Optional



Jacket


PVC



Bend Radius

10X

Marking Example:
E209277 cUL AWM STYLE 2725 80°C 30 V FT2 □□AWG
3A AWM IA 80°C 30 V □□AWG FT2 3A LF

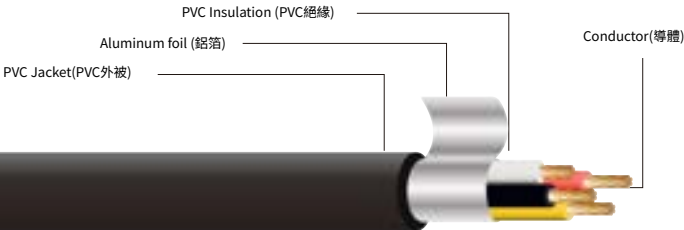

Conductor			Insulation			
AWG 線規	Stranded (No./mm) 線規/線徑	Cores (N) 芯線(C)	Insulation overall Diameter(mm) 芯線直徑(mm)	Covering&Jacket of Thickness(mm) 外被厚度(mm)		OVERALL DIAMETER 完成外徑(mm)
22	17/0.16	2	1.40	0.40	0.23	4.08±0.2
	7/0.20	2	1.25	0.40	0.23	3.76±0.2
24	11/0.16	2	1.25	0.40	0.23	3.76±0.2
	7/0.2	3	1.25	0.40	0.23	3.85±0.2
26	30/0.08	2	1.13	0.40	0.23	3.55±0.2
	30/0.08	3	1.13	0.40	0.23	3.63±0.2
	7/0.16	3	1.13	0.40	0.23	3.63±0.2
	30/0.08	4	1.13	0.40	0.23	3.90±0.2
	30/0.08	5	1.13	0.40	0.23	4.69±0.2
28	7/0.127	2	1.03	0.40	0.23	3.31±0.2

AWM UL 758

3A Plus, 3a plus (logo), and 3A (logo) are trademarks.
Other logos, product and/or Company names may be trademarks of their respective owners

