

30V PVC Cable

UL 2789
Product Description

Rated voltage
30V

Rated temperature
60°C

Fire Performances
Cable flame

AWG
Not Specified

Conductor
Solid / Stranded

Insulation
UL Labeled


Assembly
2-more insulated singles / groups to
form flat, oval, or round cables

Shield
Optional

Jacket
PVC

Bend Radius
10X

Marking Example:
E209277 cUL AWM STYLE 2789 60°C 30V VW-1 □□AWG
3A AWM IA 60°C 30V □□AWG VW-1 3A LF

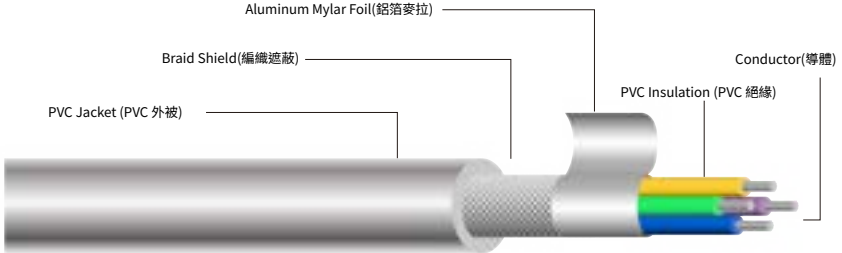

Conductor			Insulation			
AWG 線規	Stranded (No./mm) 線規 / 線徑	Cores (N) 芯數(C)	Insulation overall Diameter(mm) 芯線直徑(mm)	Covering&Jacket Thickness(mm) 外被厚度(mm)		OVERALL DIAMETER 完成外徑(mm)
18	34/0.18	3	1.85	0.13	0.76	5.45±0.10
	34/0.18	4	1.85	0.13	0.76	6.02±0.10
	34/0.18	5	1.85	0.13	0.76	7.00±0.10
22	17/0.16	3	1.40	0.13	0.76	4.60±0.10
	17/0.16	4	1.40	0.13	0.76	5.04±0.10
	11/0.16	5	1.40	0.13	0.76	5.50±0.10
24	11/0.16	3	1.25	0.13	0.76	4.27±0.10
	11/0.16	4	1.25	0.13	0.76	4.66±0.10
	11/0.16	5	1.25	0.13	0.76	5.00±0.10
26	7/0.16	3	1.13	0.13	0.76	4.03±0.10
	7/0.16	4	1.13	0.13	0.76	4.38±0.10
	7/0.16	5	1.13	0.13	0.76	4.68±0.10
28	7/0.127	3	0.94	0.13	0.76	3.70±0.10
	7/0.127	4	0.94	0.13	0.76	3.95±0.10
	7/0.127	5	0.94	0.13	0.76	4.21±0.10

AWM UL 758

3A Plus, 3a plus (logo), and 3A (logo) are trademarks.
Other logos, product and/or Company names may be trademarks of their respective owners

