



UL 2835

Product Description



Rated voltage

30V

Rated temperature

60°C

Fire Performances

Horizontal flame / Cable flame

AWG

40AWG min

Conductor

NOT SPECIFIED / UL labeled

Insulation

UL Labeled

Assembly

2-more conductors(twisted pairs / groups /laid

parallel to form flat, oval, or round cables)



Covering / Shield

Optional / PVC**Optional**

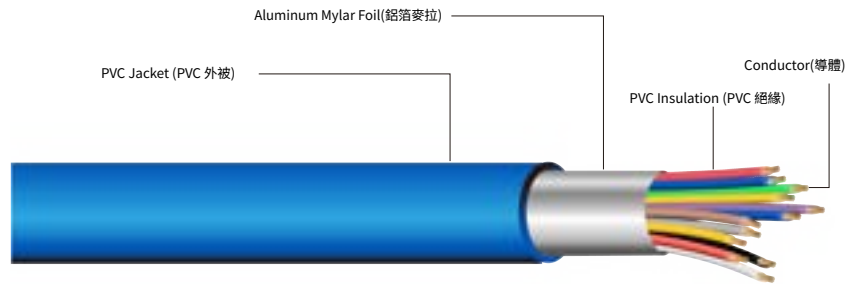
Jacket

PVC

Bend Radius

10X

Marking Example:

 E209277 cUL AWM STYLE 2835 60°C 30V VW-1 □□AWG
 3A AWM 1A 60°C 30V □□AWG VW-1 3A LF


Conductor			Insulation			
AWG 線規	Stranded (No./mm) 線規/線徑	Cores (N) 芯數(C)	Insulation overall Diameter(mm) 芯線直徑(mm)	Covering&Jacket Thickness(mm) 外被厚度(mm)		OVERALL DIAMETER 完成外徑(mm)
26	7/0.16	2	1.40	0.13	0.38	2.85±0.10
	7/0.16	3	1.40	0.13	0.38	3.27±0.10
	7/0.16	4	1.40	0.13	0.38	3.62±0.10
	7/0.16	5	1.40	0.13	0.38	3.92±0.10
	7/0.16	6	1.40	0.13	0.38	4.20±0.10
	7/0.16	7	1.40	0.13	0.38	4.46±0.10
28	7/0.12	2	0.94	0.13	0.38	2.65±0.10
	7/0.12	3	0.94	0.13	0.38	3.02±0.10
	7/0.12	4	0.94	0.13	0.38	3.33±0.10
	7/0.12	5	0.94	0.13	0.38	3.61±0.10
	7/0.12	6	0.94	0.13	0.38	3.85±0.10
	7/0.12	7	0.94	0.13	0.38	4.08±0.10
	7/0.12	8	0.94	0.13	0.38	4.29±0.10
	7/0.12	9	0.94	0.13	0.38	4.50±0.10
	7/0.12	10	0.94	0.13	0.38	4.68±0.10
	7/0.12	15	0.94	0.13	0.38	6.26±0.10
	7/0.12	25	0.94	0.13	0.38	7.57±0.10

AWM UL 758

3A Plus, 3a plus(logo), and 3A (logo) are trademarks.

Other logos, product and/or Company names may be trademarks of their respective owners

