



UL 2960

Product Description



Rated voltage

30V

Rated temperature

60°C

Fire Performances

Horizontal flame / Cable flame

AWG

32AWG min

Conductor

Solid / Stranded

Insulation

PP / PE

Assembly

2-more conductors(twisted pairs /
groups /laid parallel to form flat,
oval, or round cables)



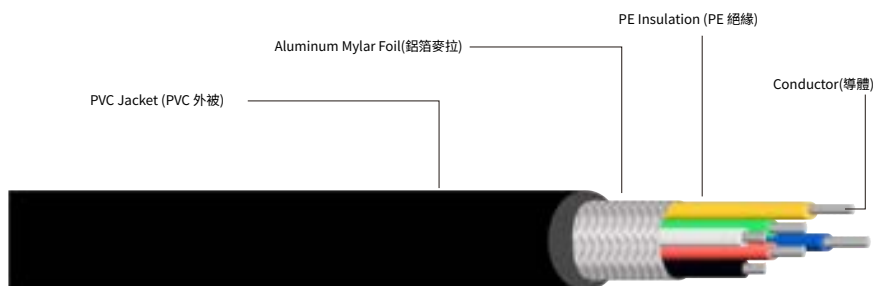
Covering / Shield

Optional / PVC**Optional**

Jacket

PVC

Bend Radius

10X

Conductor			Insulation			
AWG 線規	Stranded (No./mm) 線規/線徑	Cores (N) 芯線(C)	Insulation overall Diameter(mm) 芯線直徑(mm)	Covering&Jacket of Thickness(mm) 外被厚度(mm)		OVERALL DIAMETER 完成外徑(mm)
16	26/0.254	2	2.26	0.21	0.38	4.87±0.1
	34/0.18	2	1.96	0.21	0.38	4.39±0.1
18	34/0.18	3	1.96	0.21	0.38	5.11±0.1
	21/0.18	2	1.70	0.21	0.38	3.97±0.1
20	21/0.18	3	1.70	0.21	0.38	4.59±0.1
	21/0.18	6	1.70	0.21	0.38	5.12±0.1
22	17/0.16	2	1.52	0.21	0.38	3.67±0.1
	17/0.16	3	1.52	0.21	0.38	4.23±0.1
	17/0.16	6	1.52	0.21	0.38	4.71±0.1
24	11/0.16	2	1.37	0.21	0.38	3.43±0.1
	11/0.16	3	1.37	0.21	0.38	3.94±0.1
	11/0.16	6	1.37	0.21	0.38	4.36±0.1
26	7/0.16	2	1.25	0.21	0.38	3.23±0.1
	7/0.16	3	1.25	0.21	0.38	3.69±0.1
	7/0.16	6	1.25	0.21	0.38	4.07±0.1
28	7/0.127	2	1.15	0.21	0.38	3.06±0.1
	7/0.127	3	1.15	0.21	0.38	3.49±0.1
	7/0.127	6	1.15	0.21	0.38	3.84±0.1
30	7/0.10	2	1.07	0.21	0.38	2.93±0.1
	7/0.10	3	1.07	0.21	0.38	3.32±0.1
	7/0.10	6	1.07	0.21	0.38	3.65±0.1

AWM UL 758

3A Plus, 3a plus(logo), and 3A (logo) are trademarks.

Other logos, product and/or Company names may be trademarks of their respective owners

Marking Example:

E209277 cUL AWM STYLE 2960 60°C 30V VW-1 □□AWG

3A AWM 1A 60°C 30 V □□AWG VW-1 3A LF

