




300V SR Wire

UL 3122

Product Description

 Rated voltage
300V

 Rated temperature
200°C


 Fire Performances
Horizontal flame

 AWG
26AWG-16AWG


 Conductor
Solid / Stranded(Silver plated)

 Insulation
SR

 Covering
lacquered Braid

 Bend Radius
10X

Marking Example:
E209277 cUL AWM STYLE 3122 200°C 300V FT2 □□AWG
3A AWM IA 200°C 300V □□AWG FT2 3A LF

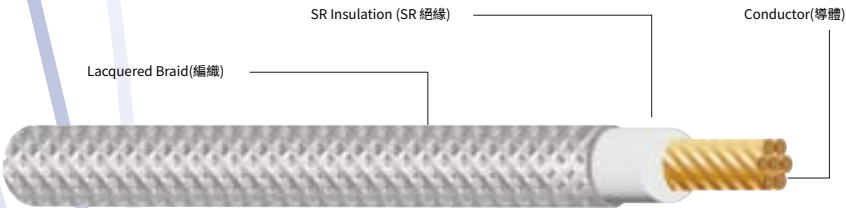

Conductor		Insulation		OVERALL DIAMETER
AWG	Stranded (No./mm)	Insulation Thickness (mm)	Covering (mm)	
線規	線規/線徑	絕緣厚度(mm)	外被厚度(mm)	完成外徑(mm)
16	26/0.254	0.44	0.16	2.70±0.1
18	34/0.18	0.44	0.16	2.41±0.1
20	21/0.18	0.44	0.16	2.15±0.1
22	17/0.16	0.44	0.16	1.96±0.1
24	11/0.16	0.44	0.16	1.81±0.1
26	7/0.16	0.44	0.16	1.69±0.1

AWM UL 758

3A Plus, 3a plus(logo), and 3A (logo) are trademarks.
Other logos, product and/or Company names may be trademarks of their respective owners