




300V SR-Silicone Wire

UL 3232

Product Description


 Rated voltage
300V

 Rated temperature
105°C


 Fire Performances
Horizontal flame

 AWG
26AWG-16AWG


 Conductor
Stranded

 Insulation
SR-Silicone

 Covering
Optional / Nylon

 Bend Radius
10X

Marking Example:
E209277 cUL AWM STYLE 3232 105°C 300V FT2 □□AWG
3A AWM IA 105°C 300V □□AWG FT2 3A LF

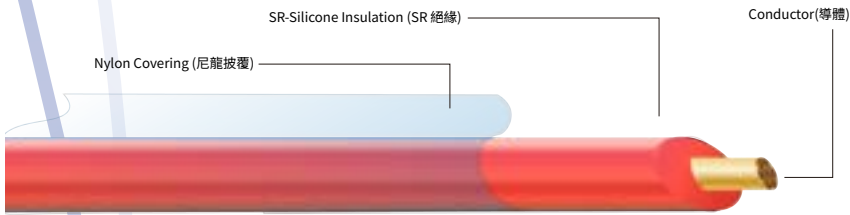

Conductor		Insulation		OVERALL DIAMETER
AWG	Stranded (No./mm)	Insulation Thickness (mm)	Covering (mm)	
線規	線規/線徑	絕緣厚度(mm)	外被厚度(mm)	完成外徑(mm)
16	26/0.254	0.44	0.11	2.60±0.1
18	34/0.18	0.44	0.11	2.32±0.1
20	21/0.18	0.44	0.11	2.06±0.1
22	17/0.16	0.44	0.11	1.87±0.1
24	11/0.16	0.44	0.11	1.72±0.1
26	7/0.16	0.44	0.11	1.59±0.1

AWM UL 758

3A Plus, 3a plus(logo), and 3A (logo) are trademarks.
Other logos, product and/or Company names may be trademarks of their respective owners