



UL 3272
Product Description

⚡ Rated voltage
600Vac/750Vdc

🌡️ Rated temperature
125°C

🔥 Fire Performances
Horizontal flame


🔗 AWG
26AWG-4AWG

📦 ²⁹CU Conductor
Solid / Stranded

🌀 Insulation
XLPE

🕒 Bend Radius
10X

Marking Example:
E209277 cUL AWM STYLE 3272 125°C 600V FT2 □□AWG
3A AWM IA 125°C 600V □□AWG FT2 3A LF

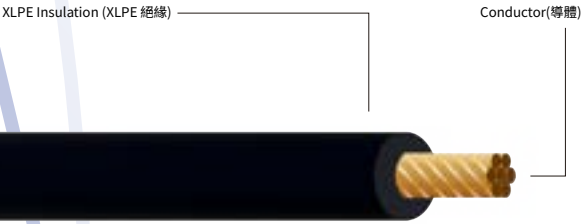

Conductor			Insulation	
AWG 線規	Stranded (No./mm) 線規/線徑	Diameter (mm) 絞合外徑	Insulation Thickness (mm) 絕緣厚度(mm)	OVERALL DIAMETER 完成外徑(mm)
4	420/0.254	6.94	1.20	8.42±0.1
6	259/0.254	5.46	1.20	7.13±0.1
8	161/0.254	3.72	1.20	6.12±0.1
10	105/0.254	3.01	0.82	4.65±0.1
12	65/0.254	2.37	0.82	4.01±0.1
14	41/0.254	1.88	0.82	3.52±0.1
16	26/0.254	1.50	0.82	3.14±0.1
18	34/0.18	1.21	0.82	2.86±0.1
20	21/0.18	0.95	0.82	2.60±0.1
22	17/0.16	0.76	0.82	2.41±0.1
24	11/0.16	0.62	0.82	2.26±0.1
26	7/0.16	0.49	0.82	2.13±0.1

AWM UL 758

3A Plus, 3a plus(logo), and 3A (logo) are trademarks.
Other logos, product and/or Company names may be trademarks of their respective owners