



UL 3385

Product Description

⚡ Rated voltage
300V

🌡️ Rated temperature
105°C

🔥 Fire Performances
Horizontal flame

🔗 AWG
32AWG-10AWG

📦 29 CU Conductor
Solid / Stranded


🌀 Insulation
XLPE

🛡️ Shield
Optional

🌀 Jacket
Optional (PVC)

🕒 Bend Radius
10X

Marking Example:
E209277 cUL AWM STYLE 3385 105°C 300V FT2 □□AWG
3A AWM IA 105°C 300V □□AWG FT2 3A LF

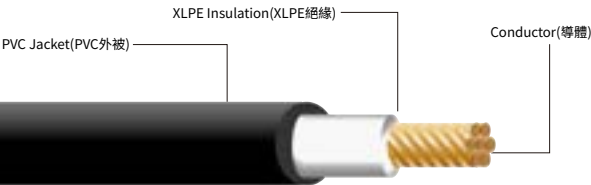

Conductor		Insulation		OVERALL DIAMETER
AWG 線規	Stranded (No./mm) 線規/線徑	Insulation Thickness (mm) 絕緣厚度(mm)	Jacket (mm) 外被厚度(mm)	
10	105/0.254	0.44	0.44	4.77±0.1
12	65/0.254	0.44	0.44	4.13±0.1
14	41/0.254	0.44	0.44	3.64±0.1
16	26/0.254	0.44	0.44	3.26±0.1
18	34/0.18	0.44	0.44	2.98±0.1
20	21/0.18	0.44	0.44	2.72±0.1
22	17/0.16	0.44	0.44	2.53±0.1
24	11/0.16	0.44	0.44	2.38±0.1
26	7/0.16	0.44	0.44	2.25±0.1
28	7/0.127	0.44	0.44	2.15±0.1
30	7/0.10	0.44	0.44	2.07±0.1
32	7/0.08	0.44	0.44	2.01±0.1

AWM UL 758

3A Plus, 3a plus (logo), and 3A (logo) are trademarks.
Other logos, product and/or Company names may be trademarks of their respective owners