



UL 3464
Product Description

⚡ Rated voltage
30V

🌡️ Rated temperature
125°C

🔥 Fire Performances
Horizontal flame

🔗 AWG
40AWG min


📦 ²⁹CU Conductor
Not Specified

🌀 Insulation
XLPE

🌀 Jacket
Optional / ETFE

🕒 Bend Radius
10X

Marking Example:
E209277 cUL AWM STYLE 3464 125°C 30V FT2 □□AWG
3A AWM IA 125°C 30V □□AWG FT2 3A LF

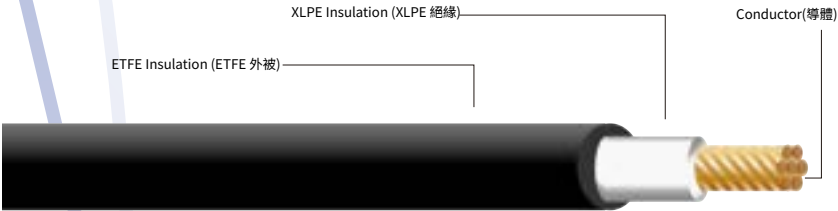

Conductor		Insulation		OVERALL DIAMETER
AWG 線規	Stranded (No./mm) 線規/線徑	Insulation Thickness (mm) 絕緣厚度(mm)	Jacket (mm) 外被厚度(mm)	
4/0	2146/0.254	0.16	0.11	14.14±0.1
3/0	1615/0.254	0.16	0.11	12.33±0.1
2/0	1330/0.254	0.16	0.11	11.24±0.1
1/0	1026/0.254	0.16	0.11	9.94±0.1
2	665/0.254	0.16	0.11	8.11±0.1
4	420/0.254	0.16	0.11	6.65±0.1
6	259/0.254	0.16	0.11	5.27±0.1
8	161/0.254	0.16	0.11	4.26±0.1
10	105/0.254	0.16	0.11	3.55±0.1
12	65/0.254	0.16	0.11	2.91±0.1
14	41/0.254	0.16	0.11	2.42±0.1
16	26/0.254	0.16	0.11	2.04±0.1
18	34/0.18	0.16	0.11	1.76±0.1
20	21/0.18	0.16	0.11	1.50±0.1
22	17/0.16	0.16	0.11	1.31±0.1
24	11/0.16	0.16	0.11	1.16±0.1
26	7/0.16	0.16	0.11	1.03±0.1
28	7/0.127	0.16	0.11	0.93±0.1
30	7/0.10	0.16	0.11	0.85±0.1
32	7/0.08	0.16	0.11	0.79±0.1
34	7/0.06	0.16	0.11	0.73±0.1

AWM UL 758

3A Plus, 3a plus(logo), and 3A (logo) are trademarks.
Other logos, product and/or Company names may be trademarks of their respective owners