




# UL 20744


## Product Description

 **Rated voltage**  
**30V/150V**


 **Rated temperature**  
**60°C / 80°C**

 **Fire Performances**  
**Horizontal flame**


 **AWG**  
**36AWG-10AWG**

 **Conductor**  
**Solid / Stranded**


 **Insulation**  
**UL Labeled**

 **Assembly**  
**2-200 insulated singles twisted pair**  
**triads or quads laid parallel in one plane**

 **Shield**  
**Optional**

 **Outer Covering**  
**PVC(Optional)/**  
**PTFE/Polyester film**

 **Bend Radius**  
**10X**

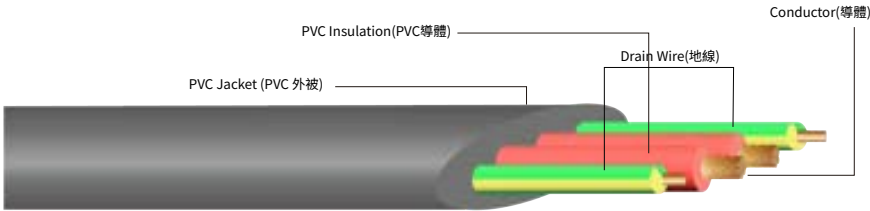

Conductor				Insulation	
AWG 線規	Stranded (No./mm) 線規/線徑	Diameter (mm) 絞合外徑	Cores (N) 芯數	Insulation of Thickness(mm) 絕緣厚度(mm)	OVERALL DIAMETER 完成外徑(mm)
30	1/0.254	1.08	2F	0.50	0.9x2.2±0.05

### AWM UL 758

3A Plus, 3a plus(logo), and 3A (logo) are trademarks.  
Other logos, product and/or Company names may be trademarks of their respective owners

**Marking Example:**  
E209277 cUL AWM STYLE 20744 80°C 30V FT2 □□AWG  
3A AWM 1A 80°C 30V □□AWG FT2 3A LF

