

600V mPPE Wire




三 甲 電 線 電 纜
3A PLUS
WIRE & CABLE

UL11047


Product Description

 Rated voltage
600V


 Rated temperature
105°C

 Fire Performances
Horizontal flame

 AWG
34AWG-4/0AWG

 Conductor
Solid / Stranded


 Insulation
UL Labeled

 Shield / Covering
Optional

 Jacket
mPPE

 Bend Radius
5X

Marking Example:
E209277 cUL AWM STYLE 11047 105°C 600V FT2 □□AWG
3A AWM 1A 105°C 600V □□AWG FT2 3A LF

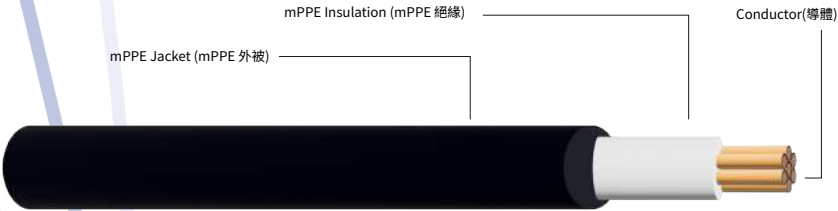

Conductor		Insulation		OVERALL DIAMETER
AWG	Stranded (No./mm)	Insulation Thickness (mm)	Covering (mm)	
線規	線規/線徑	絕緣厚度(mm)	外被厚度(mm)	完成外徑(mm)
18	34/0.18	0.26	0.29	2.05±0.10
20	21/0.18	0.26	0.29	1.80±0.10
22	17/0.16	0.26	0.29	1.60±0.10
24	11/0.16	0.26	0.29	1.46±0.10
26	7/0.16	0.26	0.29	1.35±0.10

AWM UL 758

3A Plus, 3a plus(logo), and 3A (logo) are trademarks.
Other logos, product and/or Company names may be trademarks of their respective owners