


SAS High-Speed Cable Solutions

Product Description

Supports SAS 3/4, MiniSAS 8087 / 8643 Internal Interface, 100Ω Impedance

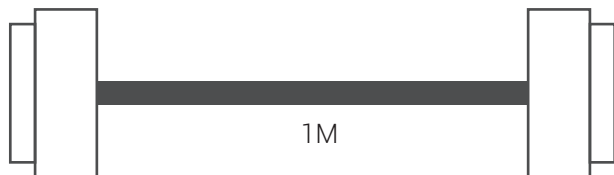

1M



HD MINISAS
36M*2 Cable, 100Ω



miniSAS 36M*2 Flat Cable,
100Ω




HD miniSAS 36-SATA*4+Sideband




miniSAS 26M-SATA 7*4




Series miniSAS HD-29F*4
Cable




SAS32F 4ch. cable, 75cm



SAS32F 4ch. cable, 75cm



SAS32F-SATA 7F*4, 75cm

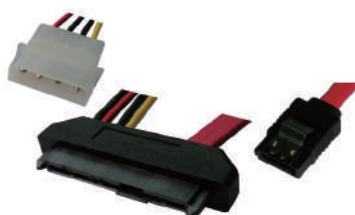

SAS29F-SATA2+power, 70cm



MiniSAS 50M/ 36M*2, 60cm

Specifications

Item	Description
Signal Standard	SAS 3 / SAS 4
Impedance	100 Ω
Connector Types	SATA 7F, SAS26F / SAS32F / SAS36F / SAS50F, miniSAS 26M / 36M / 50M, MiniSAS HD
Cable Types	Host-to-Device, Multi-SATA Out, Sideband Included, Driver Extension
Customization	Various pinouts and lengths available (e.g., 48–100 cm)